
Odkaz LAMILUX CI-System Glaselement FE

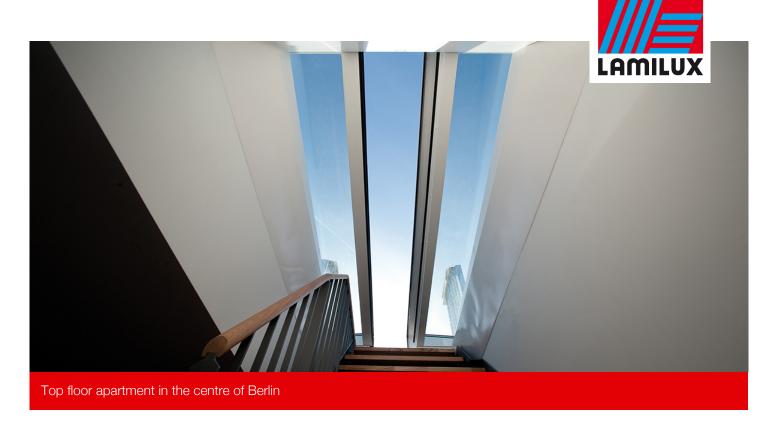


Essential Information

Place / country:	Berlin, Germany
Year:	2010
Building type:	Residential
Solutions:	Glass Skylight FE Upstand Temperature and air quality measurement station Wind and rain sensors Time control Insulation glazing
Efficiency:	41% energy saving Uw=1,6 W/(m²K) vs. Uw=2,7 W/(m²K) as per German Energy Performance of Buildings Directive 2009

Creation of a luxury living space with an exclusive ambience thanks to generous daylight intake and controllable ventilation and convenient access to the roof terrace.

- Glass Skylight FE as a two-section flat roof component which opens horizontally (automated opening and closing)
- Compact, extremely energy-efficient overall structure, placed on a fibre-reinforced composite up stand with an integrated core insulation block
- Slidable glass elements driven by electric motors, low-noise glide on stainless steel telescopic rails
- Operated using radio remote control
- Extremely heat-insulating, multi-layered insulation glazing, 78% light transmission and 54% energy transmission

Odkaz LAMILUX CI-System Glaselement FE

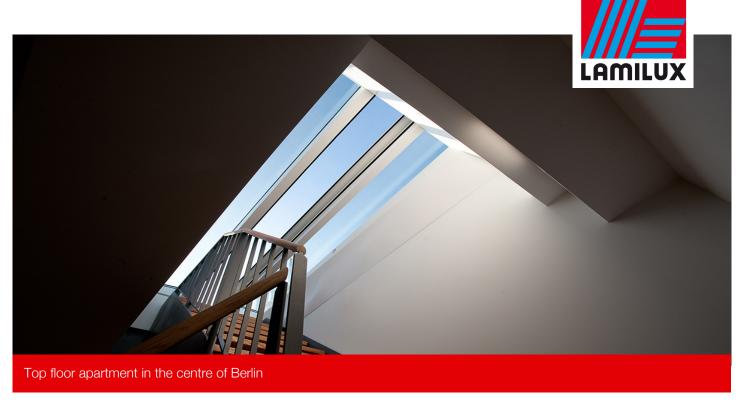













LAMILUX HEINRICH STRUNZ GMBH

Zehstraße 2 - Postfach 1540 - 95105 Rehau/N $_$ mecko - Tel: +49/(0)92 83/5 95-0 - Fax: +49/(0)92 83/5 95-29 0 E-mail: information@lamilux.de - www.lamilux.de